


Product Information

Ultimate Patch & Fill Compound

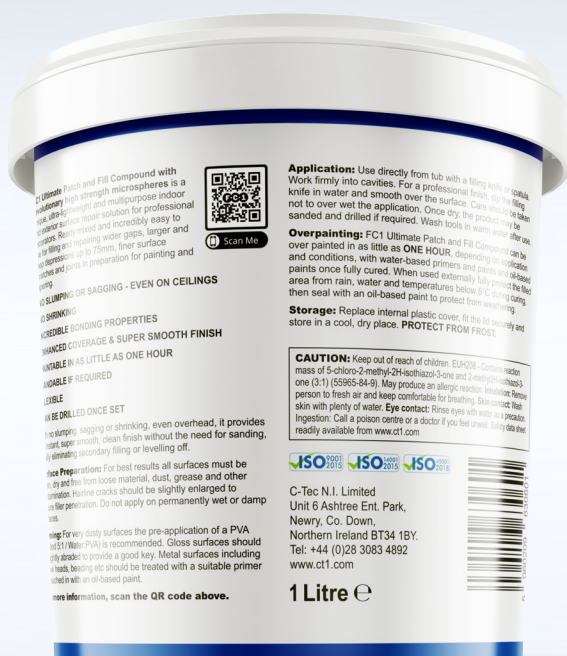

OVERVIEW

- FC1 Ultimate Patch and Fill Compound with revolutionary high strength microspheres is a unique, high performance, ultra-lightweight and multipurpose repair solution for professional decorators. Ready mixed and easy to use internally or externally for filling and repairing large gaps, deep depressions up to 75mm, surface scratches or joints in preparation for painting and papering.
- With no slumping, sagging or shrinking, it provides an instant, super smooth, clean finish without the need for sanding, totally eliminating secondary filling or levelling off. With an advanced, super white, fast drying formulation it's the solution for patching both small and deep interior repairs in one application without the need to build layers. Surface dry and over-paintable in less than 1 hour without priming (depending on application/conditions). Through drying will depend on depth of filler, temperature and humidity.

UNIVERSAL USE

- Repair cracks, deep gaps, joints or scratches
- Fill and patch gaps in plaster in one application
- Internal and external

FEATURES

- Ready mixed and ready to use
- Easy to apply
- Excellent bonding properties
- Super smooth finish, no sanding required (can be sanded if desired)
- Flexible
- Dries super white
- Paintable in less than 1 hour
- No slumping, sagging to shrinking
- Crack resistant
- Super lightweight polymer filler
- Can be drilled if required, once cured
- Very low VOC
- Incredible coverage of up to 1.75m² at 3mm deep
- Store and reuse multiple times

TECHNICAL DETAILS

Colour:	Super white
Form:	Soft, lightweight paste
Specific Gravity:	0.35
Application / service temperature:	+5°C to +30°C / -15°C to +70°C
Shelf life:	12 months
Product number:	FC1540108
Barcode number:	5060209630601
Commodity code:	3214109000
Packaging / volume:	Tub - 1 Litre

MADE IN BRITAIN

Visit www.ct1.com or call 028 3083 4892

C-Tec N.I Limited - Head Office: Unit 6 Ashtree Enterprise Park, Newry, Co Down, Northern Ireland BT34 1BY

C-Tec N.I Limited take every care to ensure that the product design, descriptions, specifications, and application techniques of our products are accurate at the date of printing. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms and conditions of sale and delivery. All information, including illustrations, is provided in good faith as a result of extensive testing, knowledge and experience. As every environment is different and the quality of substrates and application conditions are beyond our control, no liability can be concluded from this information, or from any other advice offered. For best results prior testing by the user is recommended on all substrates. C-Tec N.I. Limited constantly strives to improve goods supplied and reserves the right to alter product properties without prior notice.

Printed April 2026.

Product Applications

Ultimate Patch & Fill Compound



SURFACE PREPARATION

- For best results all surfaces must be clean, dry and free from loose material, dust, grease and other contamination. Hairline cracks should be slightly enlarged to ensure filler penetration. Do not apply on permanently wet or damp surfaces.
- Priming: For very dusty surfaces the pre-application of a PVA (diluted 5:1 / Water:PVA) is recommended. Gloss surfaces should be lightly abraded to provide a good key. Metal surfaces including screw heads, beading, etc should be treated with a suitable primer or touched in with an oil-based paint.

APPLICATION

- Use directly from the tub with a filling knife and work the product firmly into the gap. For a professional finish dip the filling knife in water and smooth over the surface. Care should be taken to not over wet the application. Once dried product may be sanded and drilled if required.
- Wash tools in warm water after use.
- FC1 Ultimate Patch and Fill Compound can be over painted in as little as ONE HOUR, depending on application and conditions, with water-based primers and paints and oil-based paints once fully cured.
- When used externally fully it is important to protect the filled area from rain, water and temperatures below 5°C during curing. Once fully cured, seal the application with an oil-based paint to protect from weathering.

LIMITATIONS

- Do not use in permanently damp or wet areas.

STORAGE

- Replace internal plastic cover, fit the lid securely and store in a cool, dry place. PROTECT FROM FROST.

CAUTION

- Keep out of reach of children. EUH208 - Contains reaction mass of 5-chloro-2-methyl-2H-isothiazol-3-one and 2-methyl-2H-isothiazol-3-one (3:1) (55965-84-9). May produce an allergic reaction.
- **Inhalation:** Remove person to fresh air and keep comfortable for breathing. **Skin contact:** Wash skin with plenty of water. **Eye contact:** Rinse eyes with water as a precaution. **Ingestion:** Call a poison centre or a doctor if you feel unwell. Safety data sheet readily available from www.ct1.com

Visit www.ct1.com or call 028 3083 4892

C-Tec N.I Limited - Head Office: Unit 6 Ashtree Enterprise Park, Newry, Co Down, Northern Ireland BT34 1BY

C-Tec N.I Limited take every care to ensure that the product design, descriptions, specifications, and application techniques of our products are accurate at the date of printing. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms and conditions of sale and delivery. All information, including illustrations, is provided in good faith as a result of extensive testing, knowledge and experience. As every environment is different and the quality of substrates and application conditions are beyond our control, no liability can be concluded from this information, or from any other advice offered. For best results prior testing by the user is recommended on all substrates. C-Tec N.I. Limited constantly strives to improve goods supplied and reserves the right to alter product properties without prior notice.

Printed April 2026.